

---

# BuzziCube Flat

## Product Specification Sheet

---

This document contains technical information about the BuzziCube Flat Solo, Duo, Trio, Quatro

---



[www.buzzi.space](http://www.buzzi.space)

## Sound absorbing pouf

The BuzziCube Flat makes sitting a pleasure for your eyes and your bottom. Upholstered with soft foam and Covered by a variety of BuzziSpace fabrics, it is bound to steal the show in any interior!

Design by BuzziSpace Studio

---

## General

- ◆ BuzziCube Flat Solo, Duo, Trio, Quatro
- 🌲 Filling: Acoustic Foam  
Upholstered in: Fabric, Trevira CS+ | CS, Revive 1, Velvet, Clara 2, Remix 3, Hero, Tonus 4, Memory 2
- ☁️ Dry usage
- 🔧 Assembled

---

## Acoustics



Absorption



Diffusion



Low tone



Mid tone



High tone

---

## Certifications



---

## Content

Configurations	3
Components	4
Fabrics	5
Dimensions	8
Acoustics	9

# Configurations

## BuzziCube Flat

Solo | Duo | Trio | Quatro



Flat

Bottom in antiskid, wood or with wheels (wheels only for Solo)




Upholstery in Fabric, Trevira CS+ | CS, Revive 1, Velvet, Clara 2, Remix 3, Hero, Tonus 4, Memory 2


		<b>Antiskid</b>			<b>Wood</b>	<b>Wheels (only for Solo)</b>
✂	Solo:	L 46 cm	W 46 cm	H 47 cm	H 50 cm	H 50 cm
		L 18.11"	W 18.11"	H 18.50"	H 19.69"	H 19.69"
	Duo:	L 92 cm	W 46 cm	H 47 cm	H 50 cm	
		L 36.22"	W 18.11"	H 18.50"	H 19.69"	
	Trio:	L 138 cm	W 46 cm	H 47 cm	H 50 cm	
		L 54.33"	W 18.11"	H 18.50"	H 19.69"	
	Quatro:	L 184 cm	W 46 cm	H 47 cm	H 50 cm	
		L 72.44"	W 18.11"	H 18.50"	H 19.69"	

		<b>Antiskid</b>		<b>Wood</b>		<b>Wheels (only for Solo)</b>	
⚖	Solo:	4 kg	8.82 lbs	6 kg	13.23 lbs	6 kg	13.23 lbs
	Duo:	7,5 kg	16.53 lbs	11,5 kg	25.35 lbs		
	Trio:	10,8 kg	23.81 lbs	17,5 kg	38.58 lbs		
	Quatro:	14,5 kg	31.97 lbs	22,6 kg	49.82 lbs		


**Solo**




**Duo**



**Trio**



**Quatro**

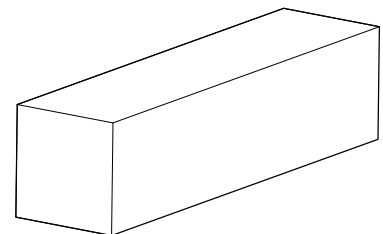


# Components

---


## Bottom

### Antiskid




Bottom:  
Antiskid

### Wood

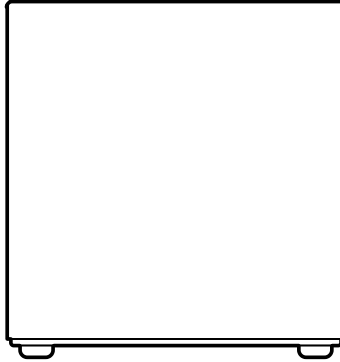


Bottom:  
Black MDF  
4 Plastic Feet

### Wheels (only for Solo)

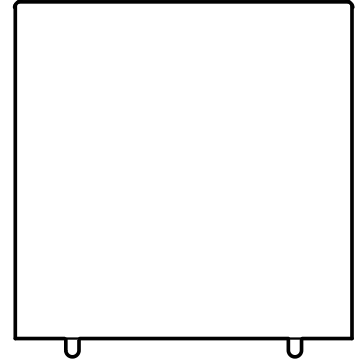


Bottom:  
Poplar multiplex  
MDF covered with antiskid  
4 Wheels  
(load capacity: 40 kg | 88.18 lbs  
per wheel)

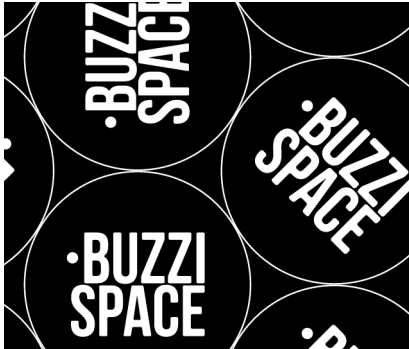

# Fabrics

## Fabric



**Category A**

**Composition** 70% Recycled Wool, 25% Recycled Polyacryl,  
5% Recycled Other Fabrics

**Weight** 405 g/m<sup>2</sup> | 11.94 oz/yd<sup>2</sup>

**Abrasion resistance** 40.000 Martindale, 50,000 Wyzenbeek

**Flammability** EU: EN 1021.1/2006 | BS EN 1021.1/2006 (cigarette).  
EN 1021.2/2006 | BS EN 1021.2/2006 (match)  
USA: CAL TB 117 | ASTM E84 CLASS A


**Fastness to light** EU: 4 | USA 4

**Fastness to rubbing** EU: Wet 3-4 | Dry 4-5

**Fastness to crocking** USA: Wet 5 | Dry 5



## Trevira CS+ | CS



**Category A**

**Weight** 420 g/m<sup>2</sup> | 12.39 oz/yd<sup>2</sup>

**Composition** 100% Polyester, Trevira CS

**Abrasion resistance** 100.000 Martindale, 90,000 Wyzenbeek

**Flammability** BS 5852 part II: CRIB 5 | BS 7176 Medium Hazard  
USA: CAL TB 117 | M1 | B1 | EN 1021/1-2 | C1 |  
IMO Res. A652 (16)

**Fastness to light** EU: 6 | USA 5


**Fastness to rubbing** EU: Wet 4-5 | Dry 4-5

**Fastness to crocking** USA: Wet 5 | Dry 5



## Revive 1

kvadrat



**Category A**

**Composition** 100% recycled polyester FR

**Weight** 430 g/lin.m

**Abrasion resistance** 60.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1  
UNI 9175 1IM | US Cal. Tech. Bull. 117  
IMO A.652 (16)


**Fastness to light** Note 5-7, ISO 105-B02

**Fastness to rubbing** (ISO) dry 5, wet 4-5

**Pilling** Note 4-5, EN ISO 12945



## Velvet



**Category B**

**Composition** 100% PES

**Weight** 375 g/m<sup>2</sup> | 11.06 oz/yd<sup>2</sup>

**Abrasion resistance** > 100.000 Martindale


**Fastness to light** EU: 4-5

**Fastness to rubbing** EU: Wet 4 | Dry 4-5

**Pilling** EU: 4-5

## Clara 2

kvadrat



**Category B**

**Composition** 92% new wool, 8% nylon

**Weight** 400 g/lin.m

**Abrasion resistance** 80.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852, ignition source 2-3 | DIN 4102 B2  
NF D 60 013 | UNI 9175 1IM | US Cal. Tech. Bull. 117, Sec. E  
NFPA 260 | IMO A.652(16)

**Fastness to light** Note 5-7, ISO 105-B02

**Fastness to rubbing** (ISO) dry 4-5, wet 4

**Pilling** Note 4, EN ISO 12945



## Remix 3

kvadrat



**Category B**

**Composition** 90% new wool, 10% nylon

**Weight** 415 g/lin.m

**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852 part 1  
Önorm B1/Q1 | NF D 60 013 | UNI 9175, 1IM  
AS/NZS 1530.3 | Cal. Tech. Bull. 117-2013  
NFPA 260 | IMO FTP Code 2010:Part 8

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** (ISO) dry 4-5, wet 4

**Pilling** Note 4, EN ISO 12945



## Hero

kvadrat



**Category C**

**Composition** 96% new wool, 4% nylon

**Weight** 580 g/lin.m

**Abrasion resistance** 45.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B2 | NF D 60 013  
UNI 9175 1IM | US Cal. Bull. 117-2013 | NFPA 260  
IMO A.652 (16)

**Fastness to light** Note 5-6, ISO 105-B02

**Fastness to rubbing** (ISO) dry 4-5, wet 4-5

**Pilling** Note 3-4, EN ISO 12945



## Tonus 4

kvadrat



**Category D**

**Composition** 90% new wool, 10% Helanca

**Weight** 665 g/lin.m

**Abrasion resistance** 100.000 Martindale rubs, EN ISO 12947

**Flammability** EN 1021-1/2 | BS 5852 part 1 | DIN 4102 B2  
Önorm B1/Q1 | NF D 60 013 | UNI 9175 1IM  
US Cal. Bull. 117-2013 | NFPA 260 | IMO A.652 (16)

**Fastness to light** Note 5-7, ISO 105-B02


**Fastness to rubbing** (ISO) dry 3-5, wet 3-5

**Pilling** Note 3, EN ISO 12945



## Memory 2

kvadrat



**Category E**

**Composition** 100% Trevira CS

**Weight** 700 g/lin.m

**Abrasion resistance**

35.000 rubs acc. to the Martindale method, EN ISO 12947

**Flammability** EN 1021-1/2 | DIN 4102 B1 | Önorm B1/Q1  
NF D 60 013 | NF P 92 507 M1 | UNI 9175 1IM  
UNI 9177 classe 1 | US Cal. Tech. Bull. 117  
IMO A.652 (16)

**Fastness to light** Note 5-8, ISO 105-B02


**Fastness to rubbing** (ISO) dry 4-5, wet 4-5

**Pilling** Note 4, EN ISO 12945




# Dimensions


**Solo**




**Duo**



**Trio**

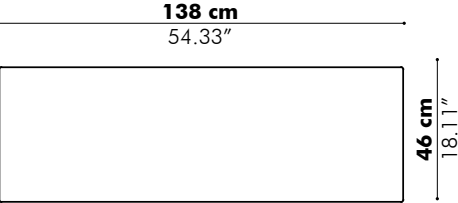

**Quatro**

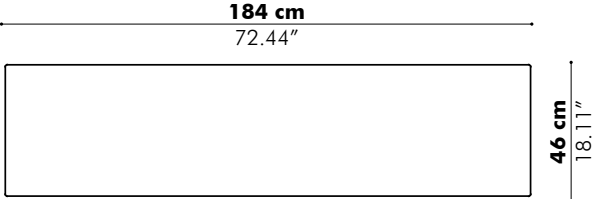

**Antiskid**



**Wood**



**Wheels**






# Acoustics

## BuzziCube Flat

Equivalent sound absorption area in m<sup>2</sup> per object

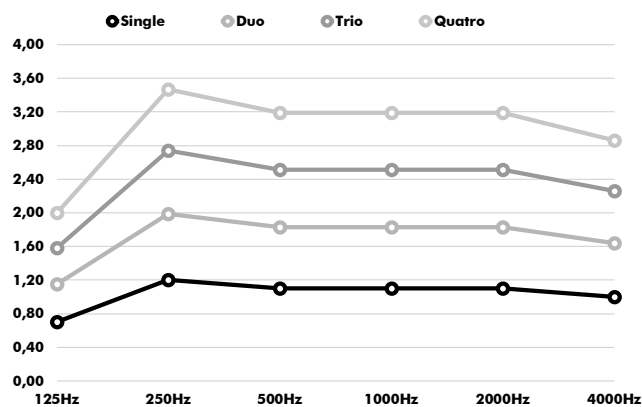

Hz	Solo Aeq/m <sup>2</sup>	Duo Aeq/m <sup>2</sup>	Trio Aeq/m <sup>2</sup>	Quatro Aeq/m <sup>2</sup>
125	0.70	1.15	1.58	2.00
250	1.20	1.99	2.74	3.47
500	1.10	1.83	2.51	3.19
1000	1.10	1.83	2.51	3.19
2000	1.10	1.83	2.51	3.19
4000	1.00	1.64	2.26	2.86